

DATA CENTER COOLING


APPLICATION

Data Center Cooling

Computer Room Air Handling

Supply / Exhaust Air Fan Arrays

Plug Fans

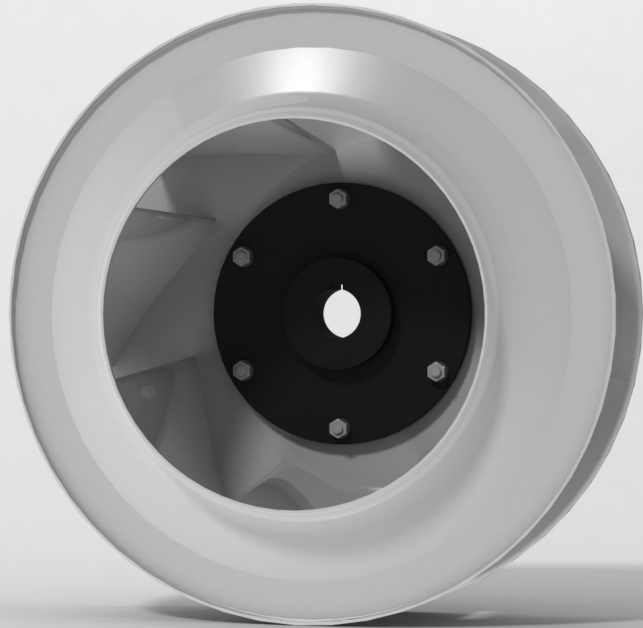

The Data Center Cooling solution by punker was developed specifically for supply and exhaust air in data centers, where very high volume flows of up to 50.000 m³/h (30.000 cfm) are required at low pressure. The new data center impeller achieves a significantly higher efficiency than competitor products in this area of application. The use of this impeller facilitates **savings in operating cost** of a data center. Another positive side effect is the **reduction in noise emission**.

**Diameter range 560 mm - 710 mm
(22" - 27")**


High static efficiency in operating area

Taperlock-Hub

Welded aluminum impeller

Airfoil blade geometry

Read our Case Study to find out how to reduce the operating cost of data center cooling with the Data Center Cooling solution by punker
<https://qrco.de/bcfyQD>






punker GmbH

Niewark 1
24340 Eckernförde
Germany
Fon: +49.4351.472.0
Fax: +49.4351.472.740
info@punker.de
▶ www.punker.com

punker LLC

1112 Lincoln County Pkwy
Lincolnton, NC 28092
USA
Fon: +1.828.322.1951
Fax: +1.828.328.1336
info@punker.com
▶ www.punker-usa.com

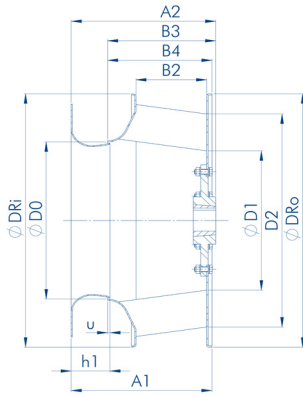

Direction of rotation

example: suction side view: clockwise rotation (R)

Wheel types							Taperlock Hubs sheet: 4.4.500-1.01					Inlet cone assembly dimensions sheet: 5.1.331-3.01			
D2	B2 mm inch	Ø DRo mm inch	Ø DRi mm inch	Ø D0 mm inch	Ø D1 mm inch	B4 mm inch	Type	Ø dmin mm inch	Ø dmax mm inch	B3 mm inch	~A2 mm inch	Type ED11	u mm inch	h1 mm inch	A1 mm inch
560	224	636	636	394,8	350	306,7	SM25	24	60	255	397,35	560	5,6	92	393,1
22"	8,82	25,04	25,04	15,54	13,78	12,07		0,94	2,36	10,04	15,64		0,22	3,62	15,48
630	252	716	716	444,2	393,8	346,3	SM25	24	60	284,6	441,25	630	6,3	100	440
25"	9,92	28,19	28,19	17,49	15,50	13,63		0,94	2,36	11,20	17,37		0,25	3,94	17,32
710	284	806	806	500,6	443,8	388,8	SM25	24	60	318,1	498,95	710	7,1	117	498,7
27"	11,18	31,73	31,73	19,71	17,47	15,31		0,94	2,36	12,52	19,64		0,28	4,61	19,63

Technical features:

- ▶ High static efficiency
- ▶ Aluminum execution
- ▶ Temperature range of -20°C to +60°C (-4°F to 140°F)
- ▶ Confirmed durability through cycle fatigue testing
- ▶ Half key balance according to ISO 8821
- ▶ Balance rating G6.3 according to ISO 21940-11
- ▶ Compatible with various AC/EC motors 50/60Hz

Note!

- ▶ Perform installation and start-up checks
- ▶ Designed for continuous operation
- ▶ Balance check with possible trim balance is recommended. System max. imbalance velocity of < 0.158 in/sec is recommended.
- ▶ When using VSD, system resonant frequencies must be avoided
- ▶ Installation and start-up should be carried out by qualified personnel only
- ▶ Use this fan wheel only with the corresponding inlet cone ED11
- ▶ For technical information please refer to fan wheels data sheet 0.0.0.01/ ...02

Note: Additional information regarding special dimensional designs, max speeds, weights and other technical data of our products is available. Please contact us.

